

DRIVE TRAIN VANE PUMP T6ER

Series T6ER * - 066 - 1 R 00 - A 1 0 - A 1 *

Y - Metric port connection, Omit for UNC

Cam ring for

Volumetric displacement cm^3/rev (in^3/rev)

042 = 132.3 (8.07)	062 = 196.7 (12.00)
045 = 142.4 (8.69)	066 = 213.3 (13.02)
050 = 158.5 (9.67)	072 = 227.1 (13.86)
052 = 164.8 (10.06)	085 = 269.8 (16.46)
057 = 180.7 (11.02)	

Type of Shaft

1 - Keyed (SAE CC)
3 - Splined (SAE C)
4 - Splined (SAE CC)

Direction of rotation (view on shaft end)

R - Clockwise
L - Counter - clockwise

Porting combination

Modifications

Seal class

- 1 = S1 (for mineral oil)
4 = S4 (for fire resistant fluids)
5 = S5 (for mineral oil and fire resistant fluids)

Design letter


Porting adapter

Coupling


- 1 = SAE A 4 = SAE C
2 = SAE B 5 = SAE J498b
3 = SAE BB 16/32-11 teeth

Adapter

- 0 = None B = SAE B
A = SAE A C = SAE C

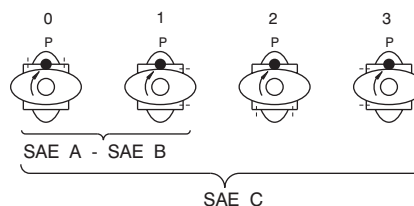


INTERNAL LEAKAGE (TYPICAL)

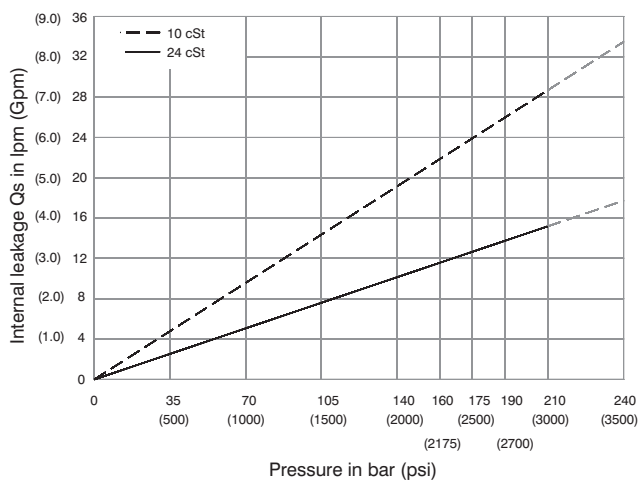


NOISE LEVEL (TYPICAL)


VT6ER - 050

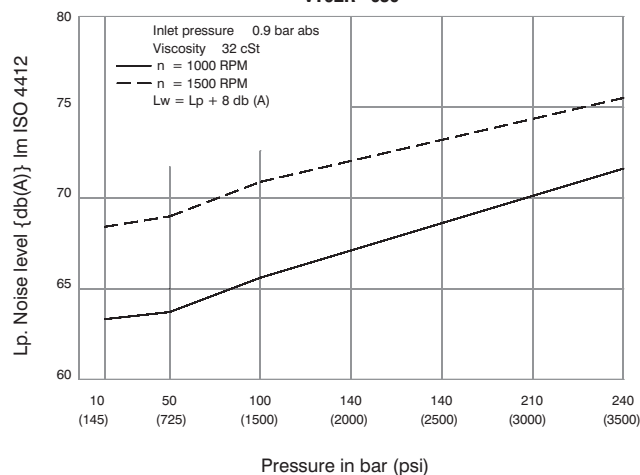


HYDROMECHANICAL POWER LOSS (TYPICAL)

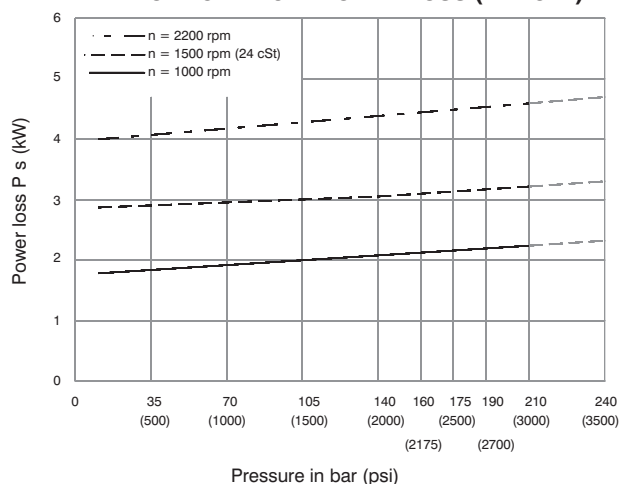

PERMISSIBLE RADIAL LOAD

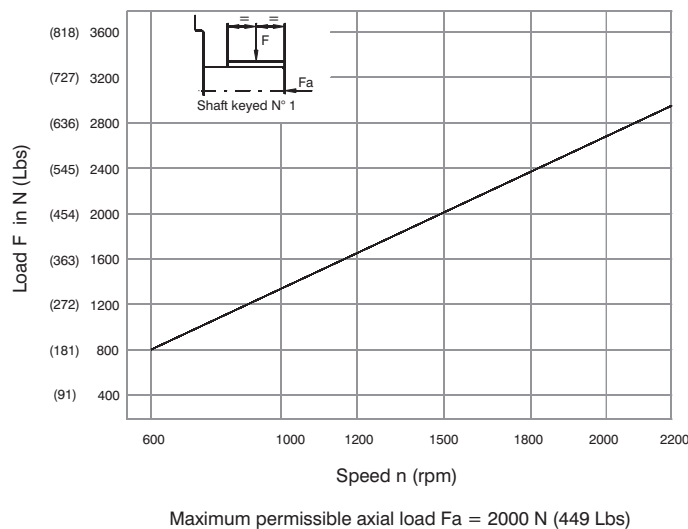

DRIVE TRAIN VANE PUMP T6ER

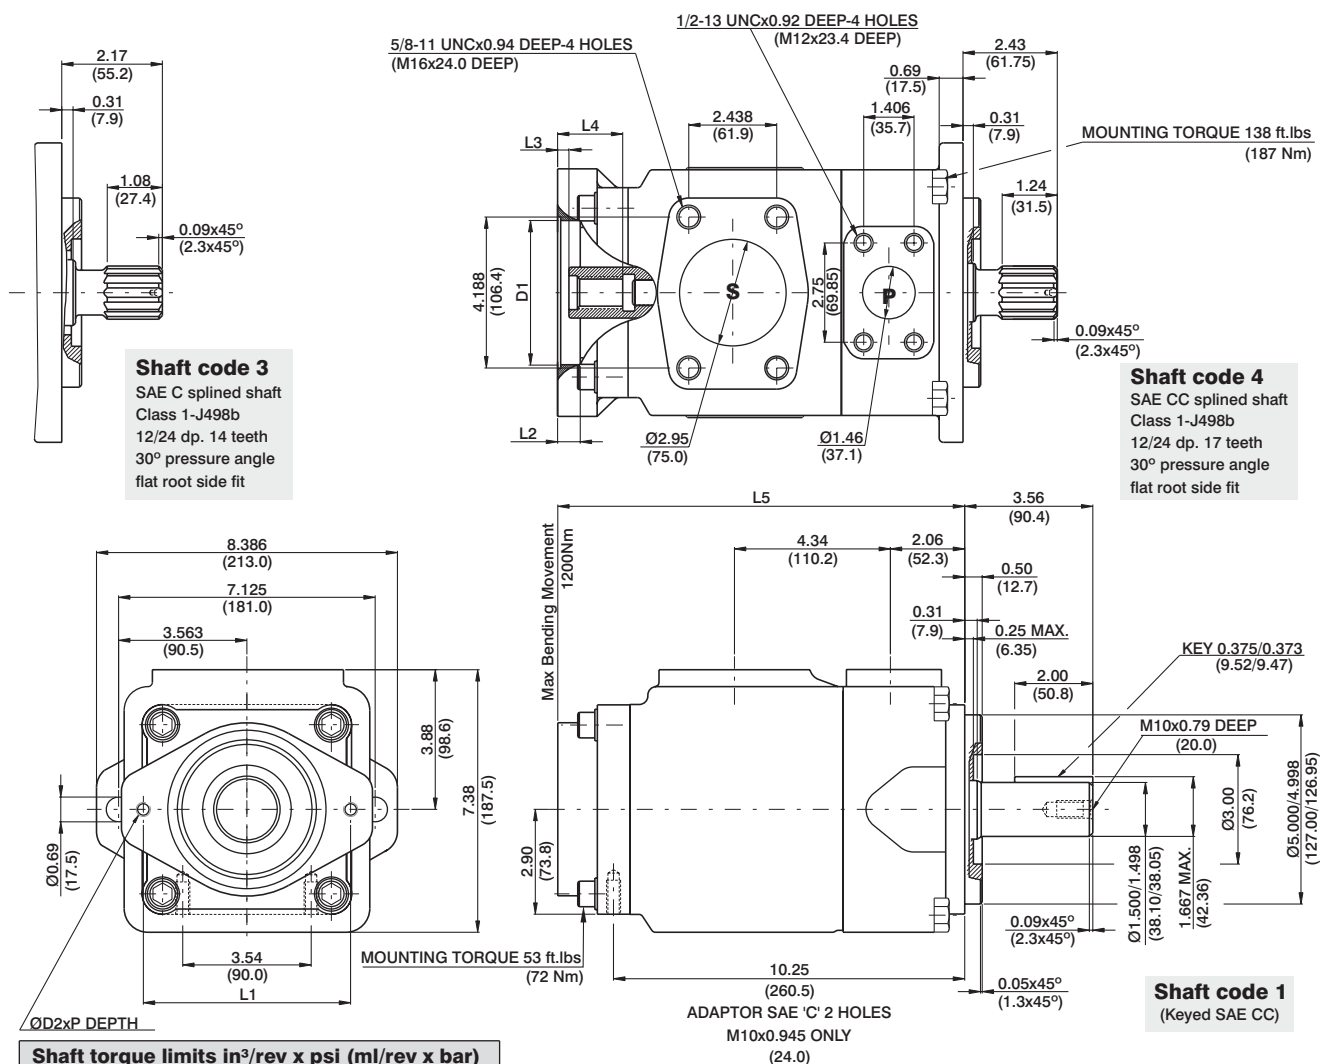

Shaft torque limits in ³ /rev x psi (ml/rev x bar)			
Shaft	V x P max.	Coupling drive	V x P max.
1	71355 (80560)	SAE"A"	9743 (11000)
3	54207 (61200)	SAE"B"	18246 (20600)
4	106474 (120210)	SAE"BB"	28937 (32670)
		SAE"C"	58884 (66480)
		SAE"11teeth"	14039 (15850)

Adaptor	D1	D2	P	L1	L2	L3	L4	L5
SAE "A"	3.25 (82.60)	M10	0.94 (24)	4.19 (106.4)	0.43 (11)	0.31 (7.9)	1.26 (32)	10.71 (272)
SAE "B"	4.00 (101.65)	M12	1.10 (28)	5.75 (146.0)	0.63 (16)	0.31 (7.9)	1.81 (46)	11.26 (286)
SAE "C"	5.00 (127.10)	M16	-	7.12 (181.0)	0.63 (16)	0.31 (7.9)	2.20 (56)	11.65 (296)

Adaptor	SAE "A"			SAE "B"		SAE "C"
Coupling drive	SAE A	SAE (11teeth)	SAE B	SAE B	SAE BB	SAE C
Number of teeth	9	11	13	13	15	14
Pitch	16/32	16/32	16/32	16/32	16/32	12/24
Pressure angle	30°	30°	30°	30°	30°	30°
Major dia.(min)	0.625 (15.875)	0.750 (19.05)	0.875 (22.225)	0.875 (22.225)	1.00 (25.40)	1.250 (31.75)
Minor dia.(min)	0.500 (12.70)	0.630 (16.00)	0.753 (19.134)	0.753 (19.134)	0.877 (22.268)	1.086 (27.585)

OPERATING CHARACTERISTICS - TYPICAL (24 cST)

Pressure port	Series	Volumetric Displacement Vp		Flow q & n = 1500 rpm						Input power p & n = 1500 rpm					
				p = 0 bar (0 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)		p = 7 bar (100 psi)		p = 140 bar (2000 psi)		p = 240 bar (3500 psi)	
		in ³ /rev	cm ³ /rev	gpm	lpm	gpm	lpm	gpm	lpm	hp	kw	hp	kw	hp	kw
T6ER	042	8.07	132.3	52.50	198.5	49.87	188.5	47.96	181.3	6.97	5.2	66.25	49.4	110.77	82.6
	045	8.70	142.4	56.51	213.6	53.86	203.6	51.98	196.5	7.24	5.4	70.94	52.9	118.95	88.7
	050	9.67	158.5	62.88	237.7	60.24	227.7	58.36	220.6	7.64	5.7	78.45	58.5	131.82	98.3
	052	10.00	164.8	65.40	247.2	62.75	237.2	60.87	230.1	7.78	5.8	81.53	60.8	136.92	102.1
	057	11.02	180.7	71.71	271.1	69.07	261.1	67.19	254.0	8.18	6.1	89.04	66.4	143.35	106.9
	062	12.00	196.7	78.04	295.0	75.40	285.0	73.52	277.9	8.58	6.4	96.42	71.9	162.67	121.3
	066	13.00	213.3	84.63	319.9	81.98	309.9	80.11	302.8	8.98	6.7	104.20	77.7	175.94	131.2
	072	13.86	227.1	90.11	340.6	87.46	330.6	85.58	323.5	9.25	6.9	110.77	82.6	187.07	139.5
	085 ¹⁾	16.40	269.8	107.00	404.7	105.21 ²⁾	397.7 ²⁾	--	--	9.78	7.3	87.56 ²⁾	65.3 ²⁾	--	--

085 = 90 bar (1300 psi) max. int.